


MCTC-HCB-U672

6.4' LCD segment

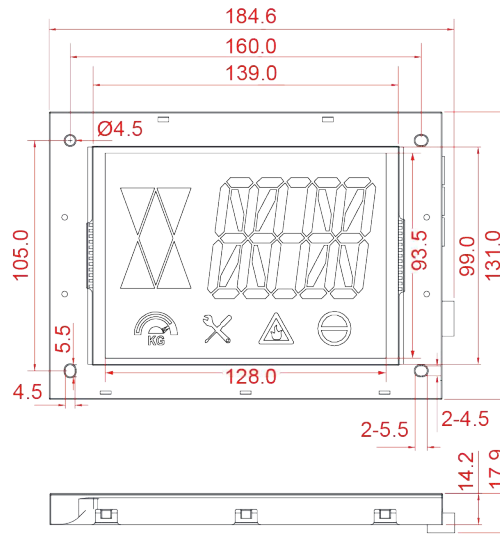

Model	Description	display board	appearance and function	colour
MCTC-HCB-U672S	encrypted		the same as MCTC-HCB-U672	blue background white letters
MCTC-HCB-U632S	encrypted		the same as MCTC-HCB-U672	black background white letters
MCTC-HCB-U632	unencrypted		the same as MCTC-HCB-U672	black background white letters

Product feature and advantage:

- Overall dimension: 184.6mmX131mmX17.9mm
- Working environment temperature:-10°C~40°C
- Widescreen 6.4' LCD segment display(landscape), display feature:blue background white letter
- DC24V power supply,Modbus communications
- MCTC-HCB-U672 interface is consistent with MCTC-HCB-U632
- With black cover in one for sale, easy to install,elegant appearance
- Support 3-digits display, energy-saving mode, setting address to 0(cryptographic),D2,D3,D4,need to use MCTC-HCB-B when used for HALL CALL

Input output connector function description:

Connector identification		CN1		J5
connector type		⑥		
function		MOD bus and power interface		Traditional address jumper wire
Pin definition	1	+24V	24V power supply	Short-circuit CN5,address changes every 2s,the address flashes 3 times after release to save.
	2	MOD+	MOD Communication line	
	3	MOD-	MOD Communication line	
	4	GND	Ground	

Note:24V power specification:18V≤voltage≤26V; 485 communication:default baud rate 38400; button light load≤25mA; No-jumper wire by factory default.