


MCTC-HCB-U671

6.4' LCD segment

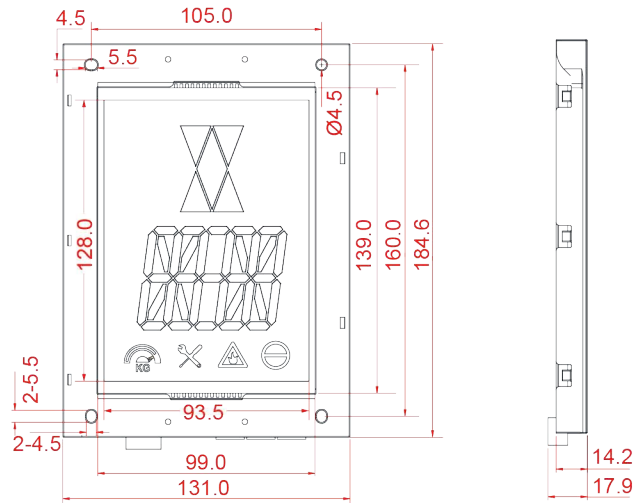

| Model | Description | display board | appearance and function | colour |
|-----------------------|-------------|---------------|---------------------------|--------------------------------|
| MCTC-HCB-U671S | | encrypted | the same as MCTC-HCB-U671 | blue background white letters |
| MCTC-HCB-U631 | | unencrypted | the same as MCTC-HCB-U671 | black background white letters |
| MCTC-HCB-U631S | | encrypted | the same as MCTC-HCB-U671 | black background white letters |

Product feature and advantage:

- Overall size: 131mmX184.6mmX17.9mm
- working environment temperature:-10°C~40°C
- Widescreen 6.4' LCD segment display (Vertical display)
- display feature:blue background white letter
- DC24V power supply,Modbus communications
- MCTC-HCB-U671 interface is consistent with MCTC-HCB-U631
- With black cover in one for sale, easy to install,elegant appearance
- Support 3-digits display, energy-saving mode, setting address to 0(cryptographic),D2,D3,D4,need to use MCTC-HCB-B when used for HALL CALL

Input output connector function description:

| Connector identification | | CN1 | | J5 |
|--------------------------|---|-----------------------------|------------------------|--|
| connector type | | ⑥ | | |
| function | | MOD bus and power interface | | Traditional address jumper wire |
| Pin definition | 1 | +24V | 24V power supply | Short-circuit CN5,address changes every 2s,the address flashes 3 times after release to save |
| | 2 | MOD+ | MOD Communication line | |
| | 3 | MOD- | MOD Communication line | |
| | 4 | GND | Ground | |

Note:24V power specification:18V≤voltage≤26V; 485 communication:default baud rate 38400; button light load≤25mA; No-jumper wire by factory default.